


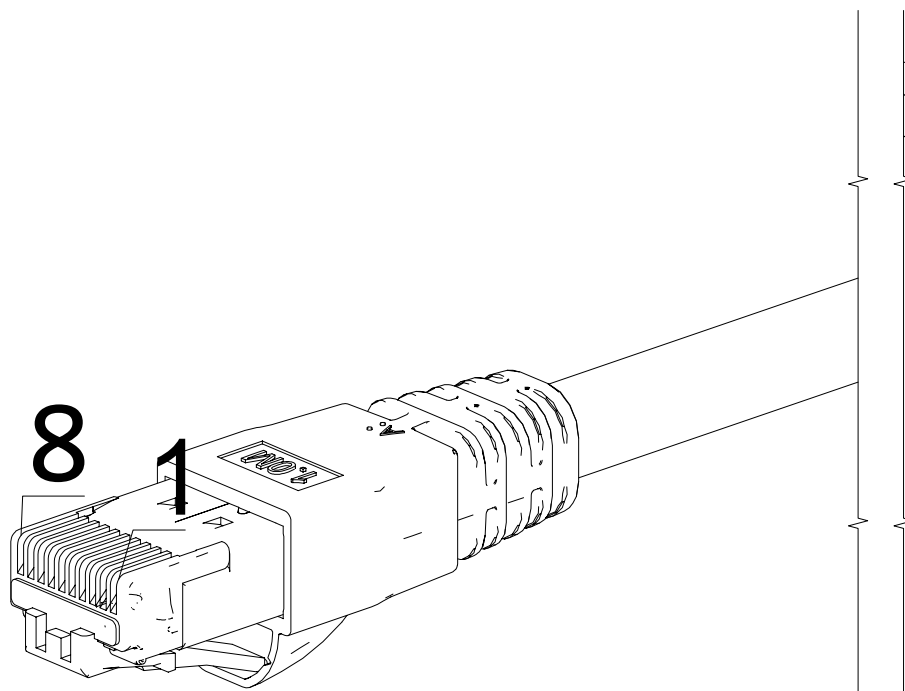

- 1: GND
- 2: GND
- 3: RX (RS-232)
- 4: TX (RS-232)
- 5: GND
- 6: FLARM +3 V DC for display
- 7: +12 to +32 V DC power supply
- 8: +12 to +32 V DC power supply

Dept.	Technical reference	Created by PJ	17/07/2026			Approved by
		Document type				Document status
		Title RJ45 CABLE PINOUT				DWG No.
			Rev.	Date of issue	Sheet 1/1	